


N 70, GAS HOB, 60 CM, TEMPERED GLASS, BLACK
T26PIP4S0

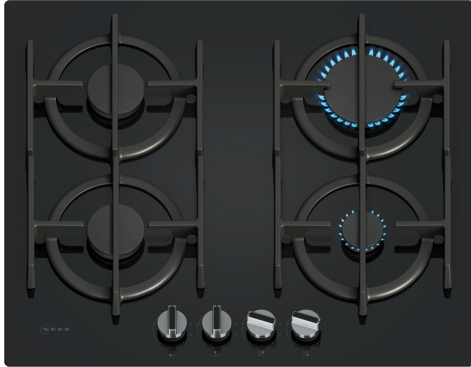

Z1365WX0	Wireless food thermometer
Z2402X0	Small pot support
Z2480X0	Simmer plate
Z9404SE0	4 pieces Set
Z9406SE0	6 pieces Set

The gas hob with precise flame control, removable dials and semi-continuous pan supports that are suitable for dishwashers - for Comfort Clean.

- ✓ FlameSelect®: Gain precise control of your flame.
- ✓ Metallic Sword Dial: Precise and removable for easy cleaning.
- ✓ Cast Iron Pan Supports: Maximum stability, easy handling, and dishwasher cleaning.
- ✓ Gas Safety Cut-Off: Safety first! No flame, no gas flow.
- ✓ Biomethane Ready: Power your hob with renewable biomethane gas.

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Number of cooking zones: 4
 Required niche size for installation (HxWxD): 45 x 560-562 x 480-492 mm
 Width of the appliance: 590 mm
 Dimensions: 54x590x520 mm
 Dimensions of the packed product (HxWxD): . 141 x 651 x 578 mm
 Net weight: 15.3 kg
 Gross weight: 16.6 kg
 Residual heat indicator: without
 Location of control panel: Front
 Basic surface material: Tempered glass
 Color of surface: Black
 Color of frame: Black
 Length electrical supply cord: 100.0 cm
 EAN code:4242004284604
 Gas connection rating:7500 W
 Fuse protection:3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



N 70, GAS HOB, 60 CM, TEMPERED GLASS, BLACK T26PIP4S0

Design

- tempered glass surface, black
- Two built-in options:
- - Flush installation - Surface mounted installation: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner hob
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Cleaning

- Removable control dials for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.
- Cast iron pan supports with rubber feet: little weight and compact form, yet high stability due to continuous surface.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- If installed flush, minimum worktop thickness is 30mm.
- Power cord: 1 m
- Connected load: 7.5 KW

N 70, GAS HOB, 60 CM, TEMPERED GLASS, BLACK
T26PIP4S0

